

ENC-501L

Article-No.: 91423

1/3" Network Colour Camera
w. CS Mount, 5VDC/230VAC,
352x272

Main features

1/3" CCD Colour Network Camera
Automatic Shutter Control (AES)
MJPEG Compression
E-Mail and FTP Transmission of Important Events
Ethernet Interface: 10/100Base-TX

Horizontal Resolution of 340 TV Lines
C/CS Mount
Simultaneous Video and Audio Signal Transmission
Activity Detection
6mm Lens Supplied








Specifications

System	colour
Video standard	PAL
Sensor size	1/3"
Imager	CCD
Imager	Interline Transfer
Sensitivity (at 50% video signal)	0,26 Lux
Sensitivity (at 50% video signal)	at F1.2 (measured)
Horizontal resolution	340 TVL
Automatic electronic shutter (ESC)	1/50 ~ 1/100,000sec.
Low speed shutter	no
Wide Dynamic Range (WDR)	no
Backlight compensation	no
Activity detection	yes
Motion detector	available
Video outputs	composite (CVBS)
Video outputs	1Vp-p, 75ohms, BNC
Audio support	no

Specifications (continued)

Alarm inputs	yes
Alarm inputs	1 (software supported)
Alarm outputs	Open collector (5V / 0.02A max.)
Alarm handling	automatic connection setup to a specified IP address
Internal storage	SD card
Compression standard	MJPEG
Resolution max.	352x272
Resolution	340 TV lines (camera), 352x288 Pixels
Image transmission rate max.	15 B./Sek.
Frame rate	25 fps max.(recording mode), up to 15 frames/sec. (streaming mode), Picture size: 4-64kB
Image display	via Web Browser or Lan-Cam-Viewer Software
Ethernet interface	10Base-T, 100Base-TX
Network protocols	TCP/IP, UDP, ICMP, FTP, DHCP, PPP, HTTP, DNS, DDNS
Remote configuration	via web browser, remote software
Lens mount	CS mount
Iris control	manual, DC
e-PTZ support	no
Serial interfaces	no
Access	10 users simultaneous support
Firmware update	via SD card
Password protection	3 password levels
Password protection	yes
Management Software Support	Zelaris
ONVIF	no
Camera mount	CS 1/4" - 20 UNC thread on bottom side
Temperature range (operation)	+5°C ~ +40°C
Colour	grey
Supply voltage	5VDC
Supply voltage	(+/-10%)
Power over Ethernet	no
Certificates	CE
Parts supplied	LanCam Viewer Software, Power supply 230V/50Hz - 2A, C mount ring, 6mm lens
Weight	approx. 300g
Dimensions (HxWxD)	50x62x95mm (see drawing)

Optional Accessories

Image	Artikel-Nr. / Typ	Description
	WD-23	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone 877
	WD-22	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Beige Grey
		SD Memory Card 256MB for DSR-01N/-04N Video Recorder, ENC-501/1004L Cameras
	ACC CONTROL S	Surveillance Software for Network Cameras from eneo, Axis
	ACC CONTROL C	Client Software for ACC_CONTROL S
	F0212M-NFS	F1.2/2.2mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0312M-NFS	F1.2/2.8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount



Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	F0412M-NFS	F1.2/4mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0612M-NFS	F1.2/6mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0812M-NFS	F1.2/8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0212NDDC-NFS	F1.2/2.2mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0312NDDC-NFS	F1.2/2.8mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0412NDDC-NFS	F1.2/4mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0612NDDC-NFS	F1.2/6mm DC Lens with No Focus Shift, 1/3" CS Mount



Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	F0812NDDC-NFS	F1.2/8mm DC Lens with No Focus Shift, 1/3" CS Mount
	G04Z03M-NFS	F1.2/4.5-12.5mm Lens, Var. Focal Length with No Focus Shift, 1/2", CS Mount
	F03Z04NDDC-NFS	F1.4/2.8-11mm DC Lens/var. Focal Length No Focus Shift, 1/3" CS Mount
	F03Z2.710DC-NFS	F1.0/3-8mm DC Lens/var. Focal Length with No Focus Shift, 1/3" CS Mount
	A04Z12NDDC-NFS	F1.2/4-12mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount
	G04Z03NDDC-NFS	F1.2/4.5-12.5mm DC Lens/variable Focal Length, No Focus Shift, 1/2" CS Mount
	YV10X5HR4A-SA2L	F1,6/5-50mm Megapixel DC Lens, 1/3", Varifocal, No Focus Shift, CS Mount

Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	F07Z07NDDC-NFS	F1.3/7.5-50mm DC Lens/var. Focal Length with No Focus Shift, 1/3" CS Mount
	A10Z04NDDC-NFS	F1.4/10-40mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount

Technical Drawing

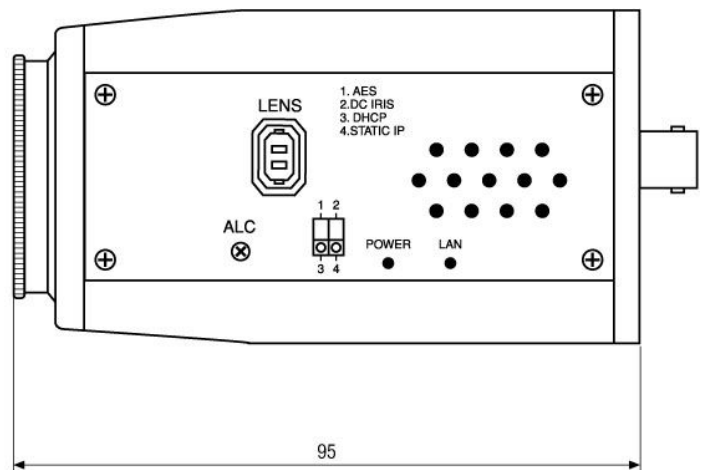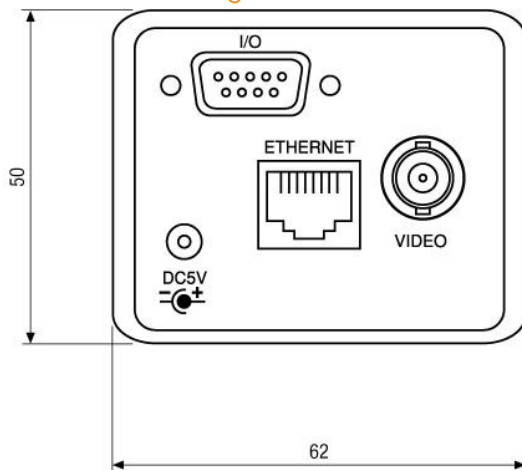

Maße/Dimensions: mm



Your partner for eneo products:

