



GLC-0501

Article-No.: 91534

1/3" Network Colour Camera
w. CS Mount, 352x272,
5VDC/230VAC

Main features

1/3" CCD Colour Network Camera
Automatic Shutter Control (AES)
MJPEG Compression
E-Mail and FTP Transmission of Important Events
Ethernet Interface: 10/100Base-TX
6mm Lens Supplied

Horizontal Resolution of 340 TV Lines
C/CS Mount
Simultaneous Video and Audio Signal Transmission
Activity Detection
Image Frame Rate: Up to 25 Fr./Sec. (352x272 Px.)
SD Socket for Local Video Storage by SD Card

Specifications

Series	eneo GL
System	colour
Video standard	PAL
Sensor size	1/3"
Imager	CCD
Imager	1/3" interlaced CCD
Sensitivity (at 50% video signal)	0,26 Lux
Sensitivity (at 50% video signal)	at F1.2 (measured)
Horizontal resolution	340 TVL
Low speed shutter	no
Wide Dynamic Range (WDR)	no
Backlight compensation	no
Activity detection	yes
Motion detector	available
Video outputs	composite (CVBS)
Video outputs	1Vp-p, CVBS, 75ohms, BNC

Specifications (continued)

Audio support	no
Alarm inputs	yes
Alarm inputs	1 (software supported)
Alarm outputs	Open collector (5V / 0.02A max.)
Alarm handling	automatic connection setup to a specified IP address
Internal storage	SD card
Compression standard	MJPEG
Resolution max.	352x272
Resolution	340 TV lines (camera), 352x288 Pixels
Image transmission rate max.	15 B./Sek.
Frame rate	25 fps max.(recording mode), up to 15 frames/sec. (streaming mode)
Image display	via Web Browser or Lan-Cam-Viewer Software
Ethernet interface	10Base-T, 100Base-TX
Network protocols	TCP, UDP, IP, ARP, ICMP, FTP, DHCP, PPP, HTTP, IGMP, DNS, DDNS
Remote configuration	via web browser, remote software
Lens mount	CS mount
Iris control	manual, DC
e-PTZ support	no
Serial interfaces	RS-232, no
Access	10 users simultaneous support
Firmware update	via SD card
Password protection	3 password levels
Password protection	yes
Management Software Support	Aimetis - Symphony, Zelaris, Netavis, GL-Manager
ONVIF	no
Camera mount	1/4" - 20 UNC thread on bottom
Temperature range (operation)	+5°C ~ +40°C
Colour	grey
Supply voltage	5VDC
Supply voltage	(+/-10%)
Power over Ethernet	no
Certificates	CE
Parts supplied	LanCam Viewer Software, Power supply 230V/50Hz - 2A, C mount ring, 6mm lens
Weight	approx. 300g
Dimensions (HxWxD)	50x62x95mm (see drawing)

Optional Accessories

Image	Artikel-Nr. / Typ	Description
	WD-22	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Beige Grey
	WD-23	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone 877
	ACC CONTROL S	Surveillance Software for Network Cameras from eneo, Axis
	ACC CONTROL C	Client Software for ACC_CONTROL S
	F0212M-NFS	F1.2/2.2mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0312M-NFS	F1.2/2.8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0412M-NFS	F1.2/4mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount


Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	F0612M-NFS	F1.2/6mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0812M-NFS	F1.2/8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
	F0212NDDC-NFS	F1.2/2.2mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0312NDDC-NFS	F1.2/2.8mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0412NDDC-NFS	F1.2/4mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0612NDDC-NFS	F1.2/6mm DC Lens with No Focus Shift, 1/3" CS Mount
	F0812NDDC-NFS	F1.2/8mm DC Lens with No Focus Shift, 1/3" CS Mount



Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	G04Z03M-NFS	F1.2/4.5-12.5mm Lens, Var. Focal Length with No Focus Shift, 1/2", CS Mount
	F03Z04NDDC-NFS	F1.4/2.8-11mm DC Lens/var. Focal Length No Focus Shift, 1/3" CS Mount
	F03Z2.710DC-NFS	F1.0/3-8mm DC Lens/var. Focal Length with No Focus Shift, 1/3" CS Mount
	A04Z12NDDC-NFS	F1.2/4-12mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount
	G04Z03NDDC-NFS	F1.2/4.5-12.5mm DC Lens/variable Focal Length, No Focus Shift, 1/2" CS Mount
	YV10X5HR4A-SA2L	F1.6/5-50mm Megapixel DC Lens, 1/3", Varifocal, No Focus Shift, CS Mount
	F07Z07NDDC-NFS	F1.3/7.5-50mm DC Lens/var. Focal Length with No Focus Shift, 1/3" CS Mount

Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	A10Z04NDDC-NFS	F1.4/10-40mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount

Technical Drawing

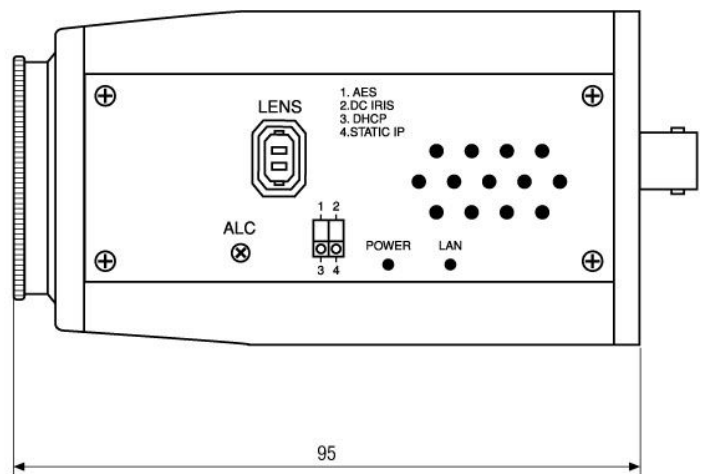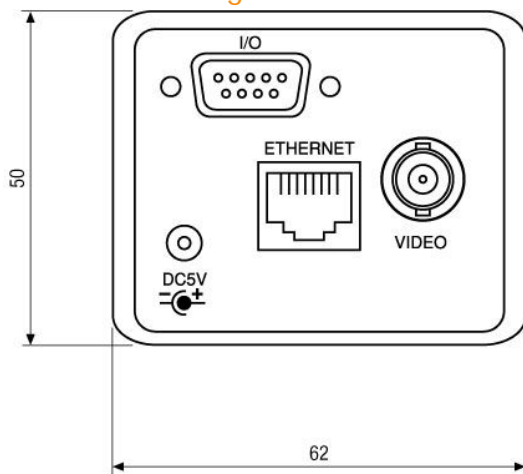

Maße/Dimensions: mm

Your partner for eneo products:

