



VKC-1338/PIR

Article-No.: 91991

1/3" Camera, Colour, 3.7mm,
470TVL, PIR Sensor, 12VDC

Main features

For wall mounting
Built-in pinhole lens F2.0/3.7mm
Automatic shutter control (ESC)
Internal synchronization
Supply voltage: 12VDC

Resolution of 470 horizontal lines
Automatic gain control (AGC)
Automatic white balance (AWB)
PIR sensor function
Easy installation




Specifications

System	colour
Video standard	PAL
Sensor size	1/3"
Imager	CCD
Imager	Sony Super HAD Interline Transfer
Synchronization	internal
Signal-to-noise ratio	48dB
Gamma correction	0.45
Horizontal resolution	470 TVL
Sensitivity (at 50% video signal)	2,0 Lux
Sensitivity (at 50% video signal)	at F1.2 (measured)
Automatic electronic shutter (ESC)	1/50 - 1/100,000sec.
Low speed shutter	no
Automatic gain control (AGC)	supplied
Digital Noise Reduction (DNR)	no
White balance	automatic
Backlight compensation	no


Specifications (continued)

Wide Dynamic Range (WDR)	no
IR cut filter	standard
Video outputs	composite (CVBS)
Lens type	fixed focal length
Lens	F2.0/3.7mm Pinhole
Focal length	3,7 mm
e-PTZ support	no
Digital zoom	no
Horizontal angle of view	68°
Iris control	no
MOD (Minimum object distance)	0,1 m
Illumination	no
Serial interfaces	no
External connections	Video (BNC), 12VDC (DC plug)
Mounting	wall mount
Temperature range (operation)	-10°C ~ +50°C
Housing material	plastic
Housing	indoor
Integrated wall mount	yes
Hidden cable management	no
Sunshield	no
Window heater	no
Colour (housing)	light grey
Vandalism resistant	no
Alarm inputs	no
Alarm outputs	-
Supply voltage	12VDC
Supply voltage	(+/-10%)
Power consumption	2.5W
Dimensions (HxWxD)	see drawing
Weight	125g
Special features	PIR sensor function. NO/NC relay contact output (125VAC/1A, 30VDC/2A resistive), Adjustable switching duration: 2-40Sec. Sensor field angles: 100° horizontal / 45° vertical. Detection range: up-to 10m
Certificates	CE

Optional Accessories

Image	Artikel-Nr. / Typ	Description
	VT-PS12DCDT1	PSU 12VDC/1.0A, Regulated, Desktop Version, 1.8m Cables each w. open ends
	VT-PS12DC-7	Plugable PSU w. Cont. & UK Mains plug-in 100-240VAC/12VDC-1.25A, Regulated
	VT-PS12DC-8	Plug-in Power Supply Unit 100-240VAC 12VDC (1.0Amp), Regulated, with DC Plug

Technical Drawing

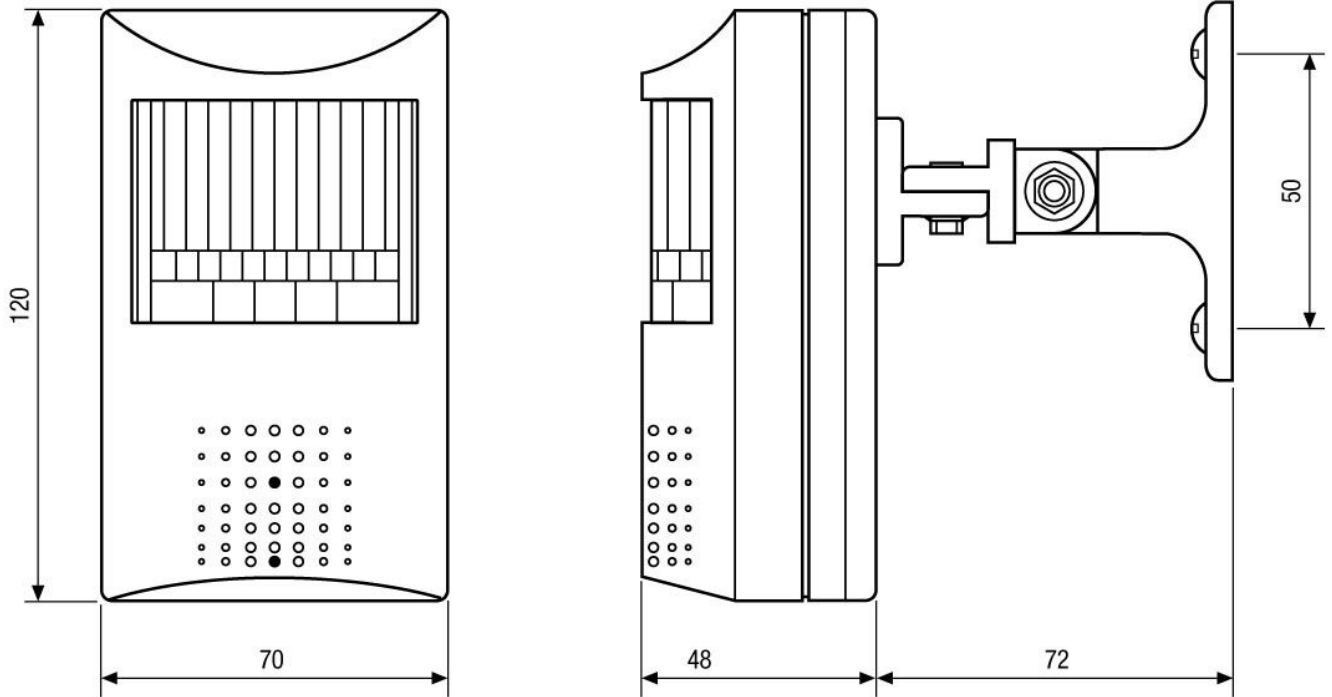

Maße/Dimensions: mm

Your partner for eneo products:

