



VKC-1365T

Article-No.: 92524

1/3" Closeup Tower Camera,
Colour, 2.9mm, 540TVL, 12VDC

Mainfeatures

Colour tower camera for facial recognition
Light sensitivity of 0.1Lux at F1.2
Automatic shutter control (ESC)
Automatic white balance (AWB)
Supply voltage: 12VDC
Mounting stand for table surface fastening

1/3" Sony Super HAD CCD
Automatic gain control (AGC)
Fixed backlight compensation (BLC)
Internal synchronization
Black, vertically adjustable aluminium enclosure
Ready for installation with pig-tail connection


Specifications

System	colour
Video standard	PAL
Sensor size	1/3"
Imager	CCD
Imager	Sony Super HAD Interline Transfer
Active picture elements	470,000, 795(H) x 596(V)
Synchronization	internal
Signal-to-noise ratio	50dB (AGC OFF)
Gamma correction	0.45
Horizontal resolution	540 TVL
Sensitivity (at 50% video signal)	0,1 Lux
Sensitivity (at 50% video signal)	at F1.2 (measured)
Automatic electronic shutter (ESC)	1/50 ~ 1/100,000sec.
Low speed shutter	no
Automatic gain control (AGC)	yes
Digital Noise Reduction (DNR)	no

Specifications (continued)

White balance	automatic
Backlight compensation	BLC
Wide Dynamic Range (WDR)	no
Aperture Correction (APC)	horizontal and vertical
IR cut filter	standard
Video outputs	composite (CVBS)
Lens type	fixed focal length
Lens	F3.0 / 2.9mm
Focal length	2,9 mm
e-PTZ support	no
Digital zoom	no
Horizontal angle of view	96,2°
Iris control	no
MOD (Minimum object distance)	0,2 m
Illumination	no
Activity detection	no
Serial interfaces	no
External adjustments	-
External connections	Video (BNC), 12V (DC plug)
Temperature range (operation)	0°C ~ +40°C
Housing material	aluminium, plastic
Housing	indoor
Integrated wall mount	no
Hidden cable management	yes
Window heater	no
Colour (housing)	black
Vandalism resistant	no
Protection rating	n/a
Alarm inputs	-
Alarm outputs	-
Supply voltage	12VDC
Power consumption	1.5W
Dimensions (HxWxD)	see drawing
Weight	1.05kg
Parts supplied	PSU 100~240V/12VDC, Drilling template, Manual
Remarks	Rotation range +/- 45°, tilt range (lens) +/- 10°
Certificates	CE

Technical Drawing

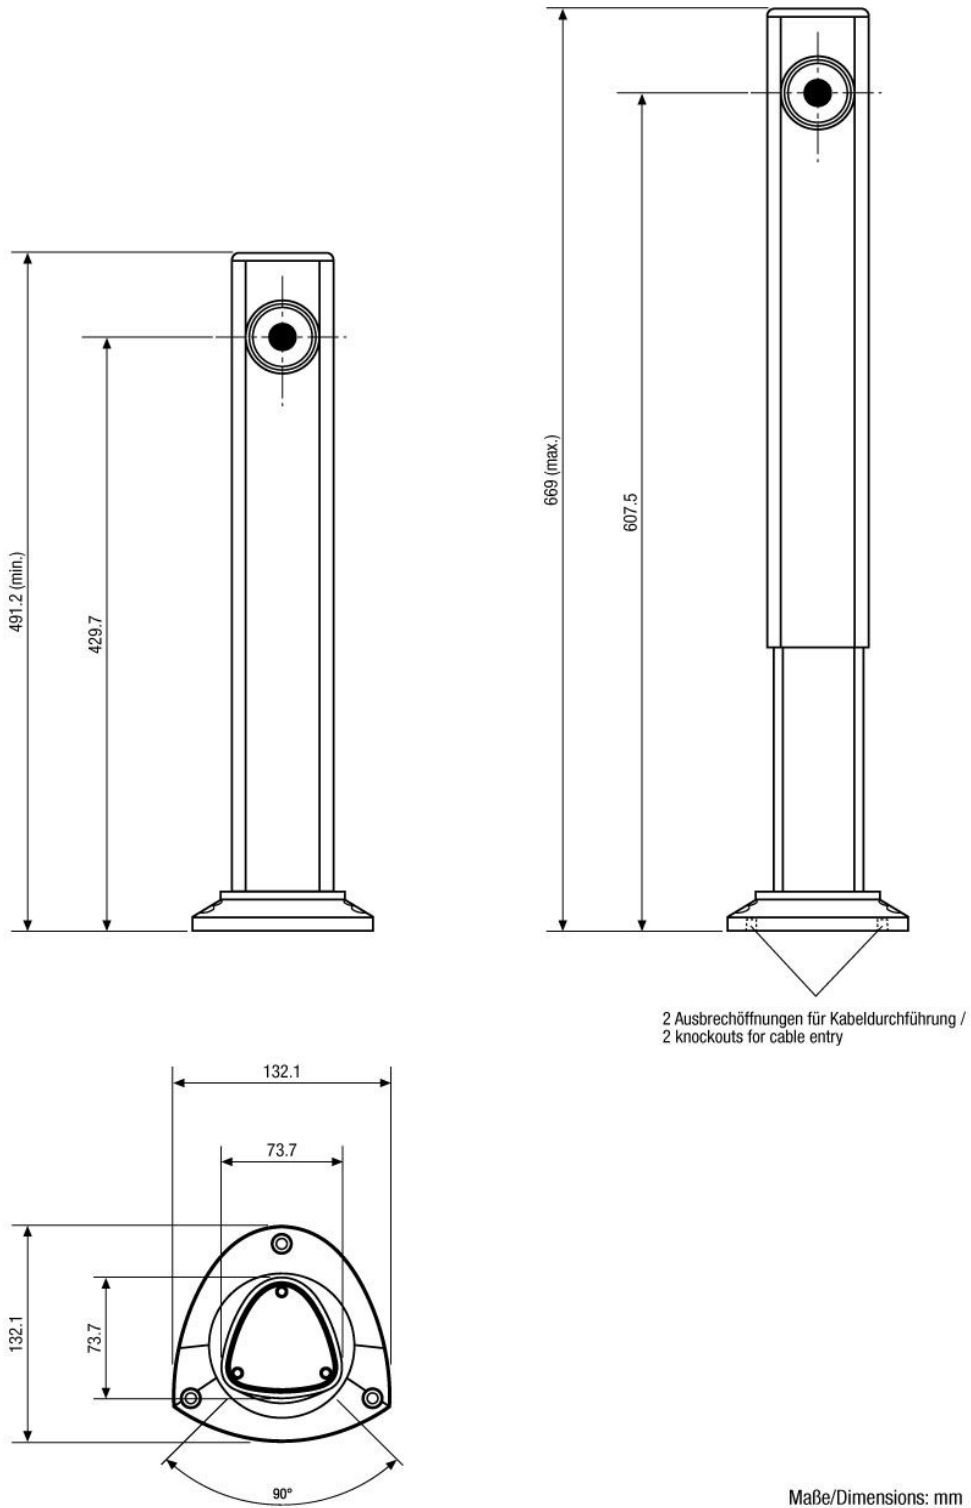



Your partner for eneo products:

